

Data rate algorithms for use in wireless local area networks**Publication number:** AU767841B**Publication date:** 2003-11-27**Inventor:** PINARD PATRICK; KAWAGUCHI DEAN**Applicant:** SYMBOL TECHNOLOGIES INC**Classification:****- international:** *H04L29/08; H04L12/28; H04L29/06; H04Q7/38; H04L29/08; H04L12/28; H04L29/06; H04Q7/38; (IPC1-7): H04L12/26***- European:** H04L12/28W; H04L29/06**Application number:** AU19990065305 19991216**Priority number(s):** US19980222126 19981229**Also published as:**

EP1017197 (A2)



JP2000209234 (A)



EP1017197 (A3)



EP1017197 (B1)



DE69925703T (T2)

more >>

Report a data error here

Abstract not available for AU767841B

Abstract of corresponding document: **EP1017197**

A communications network comprising a wireless local area network includes a plurality of access points connected to a host computer and each other, and a plurality of mobile units with each mobile unit being arranged for association with at least one access point. The mobile units are arranged to periodically scan for and identify the most eligible access point for association at the highest data rate on the basis of a performance criteria at the current data rate.

Data supplied from the **esp@cenet** database - Worldwide

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199965305 B2
(10) Patent No. 767841

(54) Title
Data rate algorithms for use in wireless local area networks

(51)6 International Patent Classification(s)
H04L 012/26

(21) Application No: 199965305 (22) Application Date: 1999.12.16

(30) Priority Data

(31) Number (32) Date (33) Country
09/222126 1998.12.29 US

(43) Publication Date : 2000.07.06

(43) Publication Journal Date : 2000.07.06

(44) Accepted Journal Date : 2003.11.27

(71) Applicant(s)
Symbol Technologies, Inc.

(72) Inventor(s)
Patrick Pinard; Dean Kawaguchi

(74) Agent/Attorney
SPRUSON and FERGUSON,GPO Box 3898,SYDNEY NSW 2001

(56) Related Art
WO 97/21294
WO 94/27382

Abstract

DATA RATE ALGORITHMS FOR USE IN WIRELESS LOCAL AREA NETWORKS

5

A communications network comprising a wireless local area network (100) includes a plurality of access points (12,13,14) connected to a host computer(10) and each other, and a plurality of mobile units (15) with each mobile unit (15) being arranged for association with at least one access point (12,13,14). The mobile units (15) are arranged to periodically scan for and identify the most eligible access point for association at the highest data rate on the basis of a performance criteria at the current data rate.

10

15

20

25

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204

DATA RATE ALGORITHMS FOR USE IN WIRELESS LOCAL AREA NETWORKS

REFERENCE TO RELATED APPLICATIONS:

5

This application is a continuation-in part of application Serial No. 08/747,034 filed November 8, 1996, which was a continuation in part of application Serial No. 08/549,051 filed Oct. 27, 1995, now U.S. Patent 5,815,811, which was a continuation-in-part of Serial No. 08/044,648, filed April 8, 1993, now U.S. Patent No. 5,528,621, which was a continuation-in-
 10 part of Serial No. 07/799,172, filed November 27, 1991, now U.S. Patent No. 5,296,842, which was a continuation-in-part of application Serial No. 07/635,859, filed December 28, 1990, now U.S. Patent No. 5,142,550, which was a continuation-in-part of application Serial No. 07/374,452, filed June 29, 1989, now U.S. Patent No. 5,029,183.

15

BACKGROUND OF THE INVENTION:

1.

Field of the Invention

The invention relates generally to wireless local area networks. In particular the invention
 20 relates to a local area wireless network with variable data transmission rates, including a plurality of mobile units roaming among access points operating at possibly different data rates.

2. Description of the Related Art.

Wireless local area networks (LANs) are used in business applications such as inventory, price verification mark-down, portable point of sale, order entry, shipping, receiving and package tracking. Wireless local area networks use infrared or radio frequency communication channels to communicate between portable or mobile computer units and stationary access points or base stations. These access points are in turn connected by a wired or wireless communication channel to a network infrastructure which connects groups of access points together to form a local area network, including, optionally, one or more host computer systems.

Wireless infrared and radio frequency (RF) protocols are known which support the logical interconnection of portable roaming terminals having a variety of types of communication capabilities to host computers. The logical interconnections are based upon an infrastructure in which at least some each of the remote terminals are capable of communicating with at least two of the access points when located within a predetermined range therefrom, each terminal unit being normally associated with and in communication with a single one of such access points. Based on the overall spatial layout, response time, and loading requirements of the network, different networking schemes and communication protocols have been designed so as to most efficiently regulate the association of the mobile unit with specific access points, and the availability of the communication channel to individual mobile units for broadcasting.

One such protocol is described in U.S. Patent Nos. 5,029,183; 5,142,550; 5,280,498; and 5,668,803 each assigned to Symbol Technologies, Inc. and incorporated herein by reference.

Another such protocol is described in U.S. Patent 5,673,031. Still another protocol is set forth in the IEEE Standard 802.11 entitled "Wireless LAN Medium Access Control (MAC) and

Physical Layer (PHY) Specifications" available from the IEEE Standards Department, Piscataway, NJ (hereinafter the "IEEE 802.11 Standard").

The IEEE 802.11 standard permits either infrared or RF communications, at 1 Mbps and 2 Mbps data rates, a medium access technique similar to carrier sense multiple access/collision avoidance (CSMA/CA), a power-save mode particularly important for battery-operated mobile units, seamless roaming in a full cellular network, high throughput operation, diverse antennae systems designed to eliminate "dead spots", and an easy interface to existing network infrastructures.

10

In Europe, the European Telecommunications Standards Institute (ETSI) has been working in parallel on a protocol standard entitled HIPERLAN (European High Performance LAN), for high data wireless network systems. The frequency spectrum for HIPERLAN in the 5 GHz and 17 GHz bands has been allocated by the European Conference of Postal and Telecommunications Administrations (CEPT), with a proposed data rate of over 20 Mbit/sec. The IEEE 802.11 Committee is also currently considering extensions to the IEEE 802.11 Standard providing for optional higher data rates as well.

15

The IEEE 802.11 Standard provides for these types of MAC frames-control, data, and management. All control frames are transmitted at one of the PHY mandatory rates, typically 1 Mbps, so that they will be understood by all stations. The other frames are transmitted at one of the rates in the basic rate set under the standard. The algorithm for performing rate switching is beyond the scope of the standard.

20

The term "roaming" relates to mobile units associating with different access points. Each mobile unit analyzes received signals from access points to identify and associate with an eligible access point. Analogous to cells in a cellular telephone network, the region around a given access point may also be referred to as a "cell".

5 Roaming between cells provides great flexibility and is particularly advantageous in locations that are difficult to wire, for simple relocation of work stations, and for portable work stations.

Although the IEEE 802.11 Standard provides the basic packet types which

10 enable roaming, it does not actually set the roaming algorithm. According to the standard, the mobile unit determines the access point with which it will associate and the access point must accept the mobile unit unless the access point is defective or certain alarm conditions exist, such as memory full. There is, however, no suggestion of how, or by what criteria, other than those mentioned above, the mobile unit might select an

15 appropriate access point, or an optimum access point.

There exists a need to implement a wireless local area network with multiple data transmission rates.

There exists a need to provide an algorithm allowing selection by a mobile unit

20 of an access point for association maximising the data throughput.

There also exists a need to provide a wireless communication system allowing roaming by a mobile unit over access points having different data rate characteristics.

SUMMARY

According to one aspect of the present invention, there is provided a method in a data communications network including a plurality of stationary access points and a

30 plurality of mobile units, the mobile unit being capable of transmitting at least two data rates and capable of communicating with at least two access points in a predetermined range therefrom, comprising the steps of:

evaluating the mobile unit performance; and

scanning for the most eligible access point at periodic predetermined intervals

35 wherein the most eligible one of the access points is selected according to received signal

quality at said one of the mobile units, and a loading factor at each of the access points, and in which an eligible group of said access points is selected from all the access points having a signal quality above a predetermined threshold; the group including a current one of the access points having a signal quality above a further predetermined threshold;

5 and

the most eligible access point being selected from all the access points having the lowest loading factor; wherein the access point of more than a given proportion of the loading factor of the current one of the stationary access points are excluded; and wherein, when a plurality of the access points has the same loading factor, the access point having the highest signal quality is selected as the most eligible access point;

10 associating with the most eligible access point at the highest data rate.

If the mobile unit performance is below a threshold and after, scanning for the most eligible access point at predetermined intervals; and if the mobile unit is unable to associate with another access point at a higher data rate, reduce to data rate to the next lower data rate.

15

If the mobile unit performance is above a threshold, increasing the data rate of the mobile unit to the next highest data rate.

20 As a variant of such algorithm, there is provided a method in data communications network including a plurality of stationary access points and a plurality of mobile units, a mobile unit being capable of transmitting at least two data rates, and capable of communicating with at least two access points in a predetermined range therefrom, including the steps to scanning for the most eligible access point at the highest available data rate; evaluating the received access point signal quality and performance at the highest data rate; associating with the most eligible access point at the highest data rate if one is available; scanning for the most eligible access point at a second lower data rate if no association has been made; evaluating the received access point signal quality at the second data rate; and associating with the most eligible access point at the second data rate.

25

30

Another aspect of the present invention provides a data communications network including a plurality of stationary access points and a plurality of mobile units, the mobile

unit being capable of transmitting at least two data rates, and capable of communicating with at least two access points at a predetermined range therefrom, comprising:

means in the mobile unit to scan for the most eligible access point at periodic predetermined intervals, wherein the most eligible one of the access points is selected according to received signal quality at said one of the mobile units, and a loading factor at each of the access points, and in which an eligible group of said access points is selected from all the access points having a signal quality above a predetermined threshold; the group including a current one of the access points having a signal quality above a further predetermined threshold; and the most eligible access point being selected from all the access points having the lowest loading factor; wherein the access point of more than a given proportion of the loading factor of the current one of the stationary access points are excluded; and wherein, when a plurality of the access points has the same loading factor, the access point having the highest signal quality is selected as the most eligible access point;

means in the mobile unit for evaluating performance statistics and received access point signal quality;

means in the mobile unit to change the data rate to a second data rate; and

means for associating with the most eligible access point at the highest data rate.

The novel features which are considered as characteristic of the invention are set forth in particular in the appended claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will best be understood from the following description of a specific embodiment, when read in conjunction with the accompanying. It is to be understood that the invention may be carried into practice in a number of ways, and the described embodiment is not intended to be limiting.

BRIEF DESCRIPTION OF THE DRAWINGS:

The features believed characteristic of the invention are set forth in the appended claims.

The invention itself, however, as well as other features and advantages thereof, may best be understood by reference to the detailed description of a specific embodiment which follows, when read in conjunction with the accompanying drawings, wherein:

5

Fig. 1 is a block diagram of a packet data communication system according to one embodiment of the invention;

10
11
12
13
14

Fig. 2 is timing diagram showing events (RF transmission) vs. time for a data transmission sequence in the system of Fig. 1;

15
16
17

Fig. 3 is a block diagram illustrating the steps carried out by a mobile unit during the rate adjusting and roaming process;

18
19
20
21
22

Fig. 4 shows a probe response message typically sent by an access point according to the present invention;

20

Fig. 5 is a flow chart illustrating the steps carried out by a mobile unit for selection of the most eligible access point;

Fig. 6 shows, schematically, the functional elements that make up the mobile units shown in Fig. 1.

DETAILED DESCRIPTION OF A SPECIFIC EMBODIMENT:

25

Referring to Fig. 1, a data communications network according to one embodiment of the invention is illustrated. A first local area network 100 is illustrated, including a host processor 10 is connected by a wired communications link 11 to a number of stationery access points or base stations 12, 13; other base stations 14 can be coupled to the host through the base stations or by an RF link. Each one of the base stations 12, 13, 14 is coupled by an RF link to a number of remote mobile units 15. In one embodiment, the remote mobile units 15 are hand-held, battery-operated data terminals or voice communication handsets such as described in U.S. Patent No. 5,029,183; Serial Nos. 08/794,782 filed February 3, 1997 (now U.S. Patent No. 6,119,944), and 09/008,710, filed 09/008,710 (now U.S. Patent No. 6,330,244), all assigned to Symbol Technologies, Inc., and incorporated herein by reference.

Various other types of remote terminals may be advantageously employed in a system having features of the invention; these remote terminals ordinarily would include data entry facilities such as a magnetic card reader or the like, as well as a display (or printer) for indicating to a user information detected, transmitted and/or received by the terminal. In this embodiment used as an illustrative example, there may be from one up to sixty-four of the base stations (three stations being shown in the Figure) and up to several hundred of the remote units; of course, the network may be expanded by merely changing the size of address fields and the like in the digital system, as will appear, but a limiting factor is the RF traffic and attendant delays in waiting for a quiet channel.

The first LAN 100 may be coupled to additional LANs 200, 300, 400 etc. through controllers such as bridges 50, 60, etc. or routers 55, 65, 75, 85, 95, 105, etc. This communications network as seen in Fig. 1 would ordinarily be used in a manufacturing facility, office building complex, warehouse, retail establishment, or like commercial facility or combination of these facilities, where the data-gathering terminals would be used for inventory control in stockroom

or receiving/shipping facilities, at checkout (point of sale) counters, for reading forms or invoices of the like, for personnel security checking at gates or other checkpoints, at time clocks, for manufacturing or process flow control, and many other such uses.

5 Although hand-held, laser scanning bar-code reader data terminals are mentioned, the data terminals may also include bar-code readers of the CCD or wand type, and may be stationery rather than hand-held. The mobile units 15 may also be voice communication handsets, pagers, still image or video cameras; or any combination of the foregoing. Other types of data gathering devices may be utilized as terminals and use the features of the invention, such as temperature, pressure, or other environmental measuring devices, event counters, voice or sound activated devices, intrusion detectors, etc.

10 According to an important feature of one embodiment of the invention, an RF packet communications protocol is provided between the remote units and the base stations, and includes a transmit/receive exchange, referred to hereinafter simply as an "exchange". This protocol is similar to collision-sense multiple access (CSMA) in that a unit first listens before transmitting, and does not transmit if the channel is not free. As seen in Fig. 2, this exchange always begins with a remote-to-base transmitted packet, representing an RF transmission from a remote unit to be received by the base stations within range. The transmitted packet is followed after a fixed time interval by a base-to-remote unit of RF information transmitted by the base station servicing this particular remote unit. Each of these packets is of fixed timing; a transceiver in a remote unit begins an exchange at its own initiative by first listening for other traffic for a brief interval t_0 (typically 0.3 msec.) and, if the RF channel is quiet, starting a transmission at a time of its own selection (asynchronous to any clock period of the base stations or host computer). This outgoing transmission packet lasts for a time t_1 as seen in the Figure, and

in an example embodiment this period is 4.8 milliseconds. Then at a precise time delay t_0 after it started transmission (e.g. 5 msec after the beginning of t_1) the transceiver begins listening for the return packet from the base station. The transceiver in the remote unit only responds to receipt of the packet beginning in a very rigid time window t_0 of a few microseconds length, and if the packet has not started during this window then anything to follow is ignored. The packet is an acknowledge signal, and also contains data if the base station has any message waiting to be sent.

The steps carried out by a mobile unit 15 which is not currently associated to an access point in selecting an access point are shown in highly simplified form in Fig. 3. In Fig. 3, the mobile unit (MU) (first noted at step 6) sends out a probe packet to all access points (APs), typically at the lowest data rate it is otherwise able to use with the network. The probe packet contains the mobile unit source address but has no destination address and hence any access point that detects the probe packet and is capable of responding at the same data rate must send a response. Accordingly, the probe packet is detected by all access points within range (step 7) and a subset of those access points sends out a probe response packet (step 8.) An evaluation of the signal quality and possibly other factors is made (as will be subsequently described) by the MU of the communications with the most eligible access point (if any) at the highest data rate. If such communications are acceptable, the MU will associate with the selected AP (step 9).

20 If the MU is already associated with an access point and operating at a data rate lower than the highest data rate, then depending upon the performance statistics (to be described below), it will carry out an update probe at predetermined intervals to see if it can operate at a higher data rate, with a new AP. Such roaming to a new AP is typically encountered when the MU is moved in and out of range, e.g. to and from the periphery of the network of APs.

25

If the MU is already associated with an access point and operating at a data rate higher than the lowest data rate but experiencing poor performance, it will carry out an update probe at predetermined intervals to see if it can roam to another AP at the same or higher data rate. Such roaming to a new AP is typically encountered when the MU is moved in and out of range, e.g. to
5 and from the periphery of the networks of APs.

The form of the probe response packet is shown in Fig.4. The information contained therein includes the access point address, the hopping pattern, the present channel, time left in the present channel, and in other embodiments of the invention, optionally the loading factor
10 (discussed in more detail below) and any other timing information that may be required. Returning to Fig. 3, the mobile unit considers the subset of available access points with which to associate based an evaluation of the signal quality of the response packets that it receives.

Referring next to Fig. 5, at each data rate the mobile unit evaluates and considers the
15 most eligible access point in the following manner:

As each probe packet response (PPR) is received 16 the signal quality of the response is measured by determining the received signal strength indication (RSSI) 17. For reference, RSSI values generally vary from 25 to 60, with good communications experienced above
20 approximately 35. In practice, rather than relying on a single instantaneous value, the RSSI information for each access point along with other performance statistics is placed in a table in the memory of the mobile unit and is updated each time a probe response packet is received from that access point. In order to minimize fluctuation the RSSI value for each access point in the table is averaged over a predetermined number of responses. It has been found that large
25 variations in the RSSI values for a given access point have been recorded even when measured

by a stationary mobile unit, and averaging is used in order to reduce the range of values and minimize "slow thrashing". When "thrashing", a mobile unit associates with a first access point, then roams to a second access point after a short period of time and then further access points in a random manner without any long attachment to a single access point; the expression "slow thrashing" may be interpreted accordingly. The averaging calculation may include the step of discarding values outside a given range, for example ten or more counts below the average RSSI value.

Once the RSSI values have been calculated, an "eligible group" of access points is selected 18, including all access points having an RSSI value no more than six counts below the best detected RSSI value. From that group the access point having the lowest load factor (LF) is determined 19, 20. The load factor is a measure of how many mobile units are currently associated with a given access point; in the present case the load factor is represented by a simple numerical value representing the exact number of associated mobile units. The access point thus selected is the most eligible access point and the mobile unit then selects that access point for association. If more than one access points within the eligible group exhibit the same load factor then, of those, the access point having the highest RSSI value is selected as the most eligible access point and the mobile unit associates with that access point.

20 The mobile units are programmed to carry out an update probe at predetermined intervals. In the present embodiment each mobile unit carries out a full scan, probing all seventy nine channels, upon power up and every thirty seconds. The probe response packet transmitted by an access point contains all necessary synchronization information for a mobile unit to latch on to the current channel of the access point and follow the hopping pattern at any stage. In an alternative arrangement the RSSI value for the access point is calculated not from the strength of

the probe response signal but from the strength of the "beacon packet" issued by the access point. Each access point issues a beacon packet every 100 milliseconds containing, in addition to other information, timing information similar to that contained in the probe response packet. A slightly different approach is taken where a mobile unit is currently associated with an access point but at a communication level that is unsatisfactory. An unsatisfactory communication level may be identified, for example, when more than fifty percent retries, cyclic redundancy code (CRC) errors or missed beacons are detected. In that case the mobile unit will re-associate using the steps illustrated in Figs. 3 and 5 except that the access point with which the mobile unit was experiencing poor communications will be excluded from the eligible group of access points (see step 18 of Fig. 5). The ineligible access point can, however, in due course be re-admitted to the eligible group after a succession of acceptable RSSI values have been observed. It should be noted that a mobile unit experiencing poor communication will re-associate only if an eligible access point is identified.

In one embodiment, in cases where a mobile unit is not experiencing an unsatisfactory communications level (as defined above) it makes a roaming decision at predetermined times. Once again the steps described above with reference to Fig. 6 are carried out, but with the following modifications:

1. The current access point is included in the eligible group if its RSSI value is no more than eleven counts below the best RSSI value.
2. When choosing the access point having the lowest loading factor in the group, access points having a loading factor which is more than 75% of the loading factor of the current access point loading factor are excluded.

The additional steps enable the mobile unit to avoid "frivolous roaming" that is to say, re-association with new access points when the current access point is in fact satisfactory.

5 The system thus allows preemptive roaming providing for dynamic load balancing, that is a mobile unit may re-associate with a new access point although it is not experiencing poor communications with a current access point, but the newer access point will offer considerably improved communications. The possibility of a mobile unit losing contact with an access point altogether and experiencing periods where it is not communicating with any access points, may
10 thus be avoided.

In addition, the system has been improved by adjusting the sensitivity so that a mobile unit will not tend to roam from a current associated access point to another at the rate that it would otherwise, where the signal strengths of various access points are similar in magnitude.
15 Accordingly, greater stability is achieved.

In a further modification the probe packet may include an identification of the access point that the mobile unit is currently associated with for example, the BSS ID. Such an arrangement would be more reliable than the messages passed between access points relaying re-
20 associated events.

Throughput Maximization

The overall goal of the dynamic rate control algorithm is to maximize throughput for
25 each Mobile Unit (MU) operating within a wireless network containing multiple Access Points

(APs). Two transmission rates are currently within the IEEE 802.11 Standard- 1 and 2 MBits/seconds and we will use such two rates as examples in the discussion that follows. In full generality, however, the present invention is also applicable to systems with more than two rates. We assume that each MU is capable of more than one rate, but will have a "currently selected" transmission rate. Performance statistics are maintained by the MU while operating at a given rate; for example, percentage of transmission retries (i.e. no Acknowledge frame received following a transmission). When the performance statistics reach or exceed certain thresholds, a state change will occur in the MU in an attempt to maximize throughput (KBytes/second of transferred data). The present invention attempts to maximize throughput in the following ways.

A. If at 2 MBits/second and the performance statistics indicate "poor quality", the MU will attempt to roam from one AP to another in order to maintain the 2 MBit/second performance. This roaming procedure is like that described below where RSSI and load leveling factors are considered in selecting the "best" AP. However, in addition, only APs which can support the 2 MBits/second rate are eligible.

B. If at 2 MBits/second and the performance statistics indicate "poor quality" and the MU was unable to roam to an AP which supports the 2 MBit rate, reduce the "currently selected" rate from 2 to 1 MBit/second and remain associated with the current AP. As described below, 1 MBit/second transmissions have a greater range (distance between an MU and an AP) than 2 MBit transmissions. The assumption is that the poor quality is due to range and that by dropping to 1 MBit the retry rate will decrease and the overall throughput will increase.

C. If at 1 MBits/second and the performance statistics indicate "good quality" and the MU has been at the 1 MBit/second rate for a period sufficient to eliminate extremely rapid rate changes (thrashing), increase the "currently selected" rate from 1 to 2 MBit/second. (Note that it is possible that the MU's position relative to the AP will once again result in poor 2 MBit performance. If so the MU may subsequently be forced to fall back to 1 MBit again, i.e. slow thrashing. However, if the MU is truly mobile, this condition will eventually change.)

Transmission Range and Transmission Rate

As noted above, MUs operating at 1 MBit transmissions have a greater range than an MV operating at a 2 MBit data transmission rate. To depict the consequence of this fact, imagine a figure depicting four Access Points and their respective ranges of coverage, both at 1 and 2 MBit transmission rates. (Note that the effective range from an AP to an MU is assumed to be the same as the range from the MU to the AP.) Place the APs at the corners of a 4 inch square. Draw a circle around each AP with a three inch radius. This is the range of "good performance" at 2 MBits. Note that the circles overlap, indicating that an MU could travel about this four AP area and maintain good 2 MBit performance. Now draw a second circle around each Access Point with a radius of 5 inches. This is the maximum range at the 1 MBit rate. Obviously, users who want continual 2 MBit performance will have to install Access Points and position them closer to one another to obtain the continuous 2 MBit coverage. It is the feature of the roaming algorithm of the present invention to roam to an AP in order to maintain 2 MBit coverage, when possible, rather than reduce the transmission rate in order to increase range. In addition, the combined roaming/dynamic rate control algorithm also has the provisions for increasing and decreasing transmission rates when roaming to maintain 2 MBit performance is not possible.

Poor 2 MBit Performance

According to the criteria in the preferred embodiment of the present invention, poor 2

- 5 MBit performance occurs when, while transmitting at 2 MBits, either of the following two conditions occurs:

A) The 2 MBit transmission retry rate is greater than or equal to 35% and there has been
a statistically-significant number of transmission attempts (e.g. thirty) within a 10
second evaluation period.

B) Eight consecutive unsuccessful 2 MBit transmission attempts. (This criteria
addresses the low traffic case.)

Of course, other similar or equivalent criteria can be used, or such criteria varied
depending upon application or other performance considerations, and are within the scope of the
present invention.

As noted above, when poor 2 MBit performance is encountered, an MU will first attempt
to roam to an AP which will support continued 2 MBit performance and, if unsuccessful, will
reduce its "currently selected" transmission rate to 1 MBit.

1. The first two transmission attempts for a given data frame will be tried at 2 MBits
(when 2 MBits is the currently selected rate for data frame transmission). Tries 2
through N are tried at 1 MBit. This allow frames to "get through" until criteria A or

B above is satisfied. This temporary reduction of rate does not change the "currently selected" rate of 2 MBit.

2. MUs periodically scan for Access Points by sending Probe frames and waiting for one or more Probe Response frames from APs which happen to be on the given frequency being probed. The Probe frames are normally sent at a 1 MBit rate; Probes will be sent at 2 MBits if an MU is configured to transmit only at 2 MBits. But the dynamic rate control algorithm is only used when an MU has the option of both transmission rates. The Probe Response frame contains a data structure which specifies the rates that the AP can support, as specified in the 802.11 Specification. This information is saved for each responding AP in an Access Point Table data structure and is subsequently available to the roam algorithm for decision making.
3. When roaming away from an AP due to poor 2 MBit quality, the AP's current averaged RSSI is saved away in its corresponding Access Point Table entry. The AP will be ineligible to roam back to, when the reason for roaming is to maintain 2 MBit performance, until its averaged RSSI has increased by 3 RSSI counts. (An ongoing average RSSI is maintained for all APs which send Probe Responses to a given MU during its periodic scan/probing function.) This prevents frivolous roaming back to an AP with known poor performance at a given signal strength level. This is analogous to the 1 MBit poor quality RSSI threshold maintained for APs and described in the earlier patent applications. The expanded roaming algorithm maintains two poor quality RSSI values for an AP, one inhibiting roaming to the AP for 2 MBit performance and one inhibiting roaming to the AP even when 1 MBit performance would be acceptable.

Changing from 1 to 2 MBit/second:

An MU will change its "currently selected" rate from 1 to 2 MBits/second whenever one
 5 of the following criteria is met:

- A) The 1 MBit transmission retry rate is less than 7% and there has been a statistically-
 significant number of transmission samples (e.g. thirty) within a 10 second evaluation
 period.
- B) The 1 MBit transmission retry rate is less than 7% and the 1-MBit rate has been in
 effect for at least 30 seconds. (Addresses the low traffic situation.)
- C) The cell has heavy traffic (500 frame detects within 10 seconds) and the 1 MBit rate
 15 has been in effect for at least 30 seconds. (Addresses the case where the 2 MBit retry
 rate is due to transmission collisions rather than range.)

Power Saving Features

20 The mobile units may incorporate a number of power-saving features, aimed at
 maximizing battery life. These features, known as "power-saving protocols" (PSP), will now be
 described in more detail, and are independent of the data rate control functionality.

The FSP can be described with reference to an expanded block diagram of a mobile unit 15 as shown in Fig. 6. Fig. 6 illustrates two sections of the MU, a radio section 30 and a terminal section 40.

5 The radio section 30 includes a transmitter/receiver radio 31 connected to an antennae 32. The radio is also connected to a circuit represented generically as ASIC 33, which may be a single IC or several, including a microprocessor, memory for storing firmware programs, static RAM, and/or application specific integrated circuits for performing a number of media level access (MAC) protocol functions and the MAC/PHY protocol interface.

10 In particular, the ASIC 33 will perform the function of recognizing the data rate of the incoming broadcast signals received by the radio 31, and processing such signals at the appropriate data rate. More specifically, in the context of the 802.11 Standard, this would include parsing of the packet header for the bit rate field.

15 The ASIC 33 also functions to implement the data rate algorithm described above and in Figures 4 and 5.

20 The terminal section 40 includes an interface 41 to the radio section 30, and a battery 48 which powers both the terminal section 40 and the radio section 30. The terminal section 40 typically includes a data entry keypad, touch screen, or keyboard 42, a display 43, CPU (including stored program memory) 44, and optionally a microphone 45, speaker 46, and CODEC/DSP circuitry 47 for voice processing to allow the mobile unit 15 terminal to provide voice communication capability.

The PSP makes use of a number of different algorithms, all of which are based on the approach of turning off the radio and CPU, both of which consume a considerable amount of power, and halting the ASIC clock in the radio section 30 while waiting for the next message from the access point. It will be recalled that the basic message control system is defined in IEEE 802.11 protocol specification, and involves the use of beacon messages with traffic indicator maps and a poll message to request transmission of the data.

The various PSP algorithms are defined in such a way as to allow a user-definable tradeoff between performance and the level of power saving.

10

15

20

25

The first algorithm is a static algorithm that wakes up the radio 31 just in time to receive every broadcast beacon. Even though the ASIC clock in the radio section has been powered down, the system still maintains a record of the time using the CMOS clock 35, which is powered by its own miniature battery 36. A similar second algorithm wakes up the radio 31 in time to receive every other beacon. Similarly, algorithms 3 to 10 switch on the radio in time to receive, respectively, every third to every tenth beacon.

Another algorithm known as "algorithm number 11" is dynamic, and permits the wakeup signals to be based on the actual message traffic. Whenever the radio 31 sends a message, or whenever it receives a message, it sets the wakeup interval to a minimum value (usually to wake up in time to receive each expected beacon.) This provides for a fast response as long as the traffic is continuous, or almost so. If no activity is detected, the algorithm provides for the wakeup interval to be gradually reduced, typically linearly, up to a maximum value of 10; in other words, at that point the radio is woken up just in time to receive every tenth beacon. Alternatively, instead of the delay increasing linearly (intervals of 1,2,3...), the algorithm may

remain on maximum for a predefined period, with the delay increasing to a maximum value only once that period has been reached.

Yet a further algorithm, known as algorithm number 12, provides for even higher
5 performance. In this algorithm, a record is kept of message traffic (based for example on the number of payload bytes of on the number of messages), and when a threshold is exceeded the radio is then switched into continuous mode. As long as significant traffic is being processed. Either outgoing or incoming, the radio will stay in continuous mode. However, if the traffic falls below the predefined threshold for a certain number of second (for example, five seconds) the
10 system then reverts back to algorithm number 11.

For all of the algorithms previous mentioned, the time of the next beacon is of course precisely known, and may be computed so that the radio can be turned on just in time to receive the beacon. If the beacon is displayed in the access point 5 (due for example to pre-existing
15 traffic), then the radio 31 will stay awake for some predefined period of time to ensure that the beacon is received.

Preferably, all mobile units respect the expected time of the beacon and do not transmit messages that might cause the timing of the beacon to be delayed.

20

If a mobile unit misses a beacon (either because it is not heard, or because it is received with an error), then the unit automatically schedules a wakeup for the next beacon, even if it would not normally expect to wake-up for that particular beacon based on the current algorithm in use. This permits fast recovery from message errors, and also helps to detect that the access
25 point 5 is or is not transmitting beacons in a minimum amount of time.

The mobile unit is capable of going into a number of operating states or modes for managing the status of the radio 31 and the interface to the terminal. To minimize power, the radio 31 is turned on only if radio activity is required, even though the radio station 30 itself may need to be powered up to allow communications with the terminal section 40. If the radio section 30 powers up to communicate with the terminal section, and it becomes time to receive or to transmit a message, then the radio 31 is automatically powered up. Whenever the radio is no longer needed, but the interface 34 remains active, the radio may be powered down in order to save power. When the radio section 30 has no requirement to communicate either via the interface 34 or via the antennae 32, all elements of the radio are powered down, as is the ASIC 33. The system then awaits a wakeup call either from the beacon timer associated with the clock 35 or from the terminal section 40 (for example, because the user has activated the data entry 42).

15 If the mobile unit is unassociated with an access point, it may remain in power save mode. In that mode, it automatically wakes up to search for an access point periodically (for example every second), thereby minimizing use of power but still providing a reasonable capability of finding an access point with which the unit can associate fairly rapidly. Once the mobile unit has associated with an access point, it needs to wake up only in order to receive 20 beacon messages.

The mobile unit preferably provides close coupling between the radio section 30 and the terminal section 40, in order to provide appropriate network support with minimum power usage. The units typically have an active mode (either full power or power-save mode), a suspend mode 25 (all unnecessary items are off but the CPU can resume at any time), and a power-off mode

(minimum power, with no internal activity except for the CMOS clock 35, but still able to resume from where it left off before the power was cut.)

The radio section 30 is tightly integrated with the terminal section 40 in several ways, thereby permitting joint power saving modes. Firstly, the radio section may be set to remain in its prescribed operating mode whenever the terminal section 40 is active. Second, when the terminal section 40 goes into suspend mode, the radio section 30 is placed in a low power mode automatically. This may for example be the PSP algorithm number 10, described above. In this mode, the radio section is capable of receiving messages directed to the terminal section 40. Options exist to allow either directed packets only, or directed and broadcast/multicast packets. These options allow the customization of the network to minimize the power by minimizing wakeup events. When a qualified packet is received, the radio section 30 places the data in a buffer within RAM (not shown) and wakes up the terminal section 40. As the terminal section may require some time to wake up, radio section 30 may buffer received packets until such time as the terminal section 40 is able to process them.

While in the suspend mode, the radio section 30 has the option of powering itself down if no activity has been detected for a programmable amount of time, for example 1 hour. This allows a mobile unit that has been left inactive, or has gone out of range, to limit battery consumption to a reasonable amount.

If the terminal has been turned "off" (left in a powered but fully inactive state), the radio section 30 is automatically put to sleep, the lowest level of power consumption. In this mode, it does not respond to messages or to wakeup commands. When the terminal section 40 is then

powered up ("Resume"), the radio section 30 itself the automatically powers up and resumes form its present state.

If the terminal section 40 loses power (for example, if the battery 48 is removed), the radio section 30 is automatically switched off or otherwise powered down. In that mode, the battery 36 may act as a backup battery, able to sustain the operating state of the terminal section. Alternatively, a separate backup battery (not shown) may be provided. When the battery 48 is reinserted or an alternative power source becomes available, the terminal section 40 is able to resume with no loss of data, automatically powering itself up and reconfiguring the radio section 30 with no intervention required by the operator. After the radio section 40 has been reconfigured, it scans in the normal way for access points and re-establishes association with the network.

The terminal section 40 and the radio section 30 may also be provided with further functionality to prevent a lockup state occurring between the two sections during a suspend or power-down operation. Here the terminal section 40 interrupts the radio section 30 and commands that no wakeup operations be generated for a minimum interval (for example 1 second). During that interval, the terminal section 40 can then safely suspend or power-down. After that interval has elapsed, the radio section 30 is free to wakeup the terminal section 40 when a message is received.

The terminal section 40 and the radio section 30 may coordinate communications using a command register and an 30 interrupt. In one embodiment, the radio section 30 may include a programmable wakeup timer. The radio section 30 may then be woken up either by that timer, or

by a message communicated over the airwaves and received by the radio 31, of by a command received from the terminal section 40 via the interface 34.

In order to synchronize the interface 34 the terminal section may generate one of three commands, with the radio section responding with a ready flag. The three commands are Awake for Host, Resume, and Sleep. These cause the radio section 30 to execute different actions, as described below.

In response to the Awake for Host command, the radio section 30 sets the ready flag. This allows the terminal section 40 to communicate directly with the radio section 30, to receive messages, to send messages and to process commands. In response to the Resume command, the radio section 30 turns off the ready flag to indicate that it is in an uncoordinated state, and the radio section 30 can power down whenever it decides that it has finished with communications both with the radio 31 and with the terminal section 40. In this mode, the radio section 30 will wakeup whenever a signal is received from the wakeup timer associated with the clock 35.

In response to the Sleep command, the radio section 30 stops whatever operations it may have been carrying out, in the minimum amount of time, and then goes to a low power suspend mode. When the radio section 30 receives a Resume message, it then reverts back to normal PSP mode.

It will be understood that each of the features described above, or two or more together, may find a useful application in other types of wireless local area network and data communications system differing from the types described above.

While the invention has been illustrated and described as embodied in it is not intended to be limited to the details shown, since various modifications and structural changes may be made without departing in any way from the spirit of the present invention.

5 Without further analysis, the foregoing will so fully reveal the gist of the present invention that others can readily adapt it for various applications without omitting features that, from the standpoint of prior art, fairly constitute essential characteristics of the generic or specific aspects of this invention and, therefore, such adaptations should and are intended to be comprehended within the meaning and range of equivalence of the following claims.

10

15

20

25

The claims defining the invention are as follows:

1. A method in a data communications network including a plurality of stationary access points and a plurality of mobile units, the mobile unit being capable of transmitting at least two data rates and capable of communicating with at least two access points in a predetermined range therefrom, comprising the steps of:

evaluating the mobile unit performance; and

scanning for the most eligible access point at periodic predetermined intervals

wherein the most eligible one of the access points is selected according to received signal quality at said one of the mobile units, and a loading factor at each of the access points, and in which an eligible group of said access points is selected from all the access points having a signal quality above a predetermined threshold; the group including a current one of the access points having a signal quality above a further predetermined threshold; and the most eligible access point being selected from all the access points having the lowest loading factor; wherein the access point of more than a given proportion of the loading factor of the current one of the stationary access points are excluded; and wherein, when a plurality of the access points has the same loading factor, the access point having the highest signal quality is selected as the most eligible access point;

associating with the most eligible access point at the highest data rate.

2. The method as defined in claim 1, further comprising the step of transmitting a data packet from a mobile unit to an access point at a selected frequency which is one of a predetermined sequence of frequencies in a band, said selected frequency being changed at regular intervals within a repeat period.

3. The method as defined in claim 2, wherein the access point transmits at predetermined intervals a beacon data packet that includes a control frame such packet being transmitted at a data rate that can be understood by all mobile units on the network.

4. The method as defined in claim 2, further comprising the step of receiving said data packet at said access point at said selected frequency and synchronizing said access point in response to the data rate of the mobile unit.

5. The method as defined in claim 1, wherein the step of evaluating the mobile unit performance measures a percent of transmission.

6. The method as defined in claim 1, wherein the step of associating with the most eligible access point is performed by selecting the access point and data rate that maximizes data throughput.

7. A data communications network including a plurality of stationary access points and a plurality of mobile units, the mobile unit being capable of transmitting at least two data rates, and capable of communicating with at least two access points at a predetermined range therefrom, comprising:

means in the mobile unit to scan for the most eligible access point at periodic predetermined intervals, wherein the most eligible one of the access points is selected according to received signal quality at said one of the mobile units, and a loading factor at each of the access points, and in which an eligible group of said access points is selected from all the access points having a signal quality above a predetermined threshold; the group including a current one of the access points having a signal quality above a further predetermined threshold; and the most eligible access point being selected from all the access points having the lowest loading factor; wherein the access point of more than a given proportion of the loading factor of the current one of the stationary access points are excluded; and wherein, when a plurality of the access points has the same loading factor, the access point having the highest signal quality is selected as the most eligible access point;

means in the mobile unit for evaluating performance statistics and received access point signal quality;

means in the mobile unit to change the data rate to a second data rate; and

means for associating with the most eligible access point at the highest data rate.

8. The network as defined in claim 7, wherein each mobile unit includes a transmitter for broadcasting a probe packet to all of the access points in a predetermined range from the mobile unit that is broadcasting the probe packet, said access points within said range including respective receivers for detecting the probe packet being broadcast, and for responsively sending probe response packets back to said one of the mobile units, and a selector in each of the mobile units to select a most eligible one of the access points from

said probe response packets, and to associate said one of the mobile units with the most eligible one of the access points at predetermined intervals.

9. The network as claimed in claim 7, in which said one of the mobile units identifies
5 all said stationary access points with a signal quality at least equal to a threshold value, and selects for association the most eligible one of the access points having the lowest loading factor, and in which, when a plurality of said stationary access points has an equal lowest loading factor, the stationary access point having the highest received signal quality is selected.

10
10. The network as claimed in claim 9 in which a threshold value is set below the highest received signal quality.

11. The network as claimed in claim 10, in which one of said plurality of the mobile
15 units, associated with one of said stationary access points and experiencing an unacceptably low signal quality, roams and excludes said one of the stationary access points from selection.

12. The network as claimed in claim 10 wherein an unacceptably low signal quality is
20 achieved when more than 50% retries, CRC errors or missed beacons are experienced.

13. The network as claimed in claim 10 in which the excluded one of the stationary
access points is re-included for selection when the received signal quality exceeds a predetermined limit.

25
14. The network as claimed in claim 10 in which, if none of the stationary access points is identified for re-association, said one of the mobile units continues to associate with a current one of the stationary access points.

15. The network as claimed in claim 10 in which each of the mobile units, associated
30 with a current one of the stationary access points and achieving a satisfactory level of communication, makes a selection decision at selected intervals.

16. A method in a data communications network including a plurality of stationary access points and a plurality of mobile units, said method substantially as described hereinbefore in relation to any one of the described embodiments as that embodiment is shown with reference to Figs. 1 to 6 of the accompanying drawings.

5

17. A data communications network including a plurality of stationary access points and a plurality of mobile units, said network substantially as described hereinbefore in relation to any one of the described embodiments as that embodiment is shown with reference to Figs. 1 to 6 of the accompanying drawings.

10

DATED this Nineteenth Day of September, 2003


Symbol Technologies, Inc.

Patent Attorneys for the Applicant

SPRUSON & FERGUSON

15



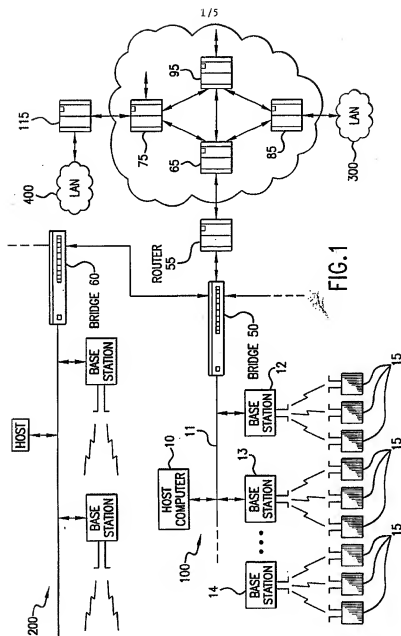




FIG. 2

280200 65305

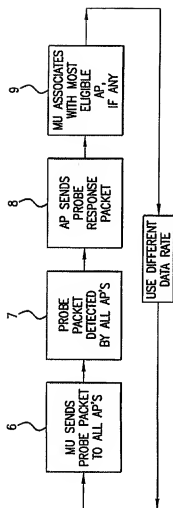


FIG. 3

AP ADDRESS	HOPPING PATTERN	PRESENT CHANNEL	TIME LEFT IN CHANNEL	LOADING FACTOR	OTHER TIMING INFORMATION
------------	-----------------	-----------------	----------------------	----------------	--------------------------

FIG. 4

280200 65305

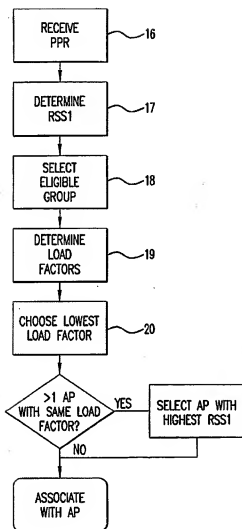


FIG.5

90229 003082




FIG.6

50529 007097